


iPoint IP Cameras



5MP Motorized Zoom IR Dome

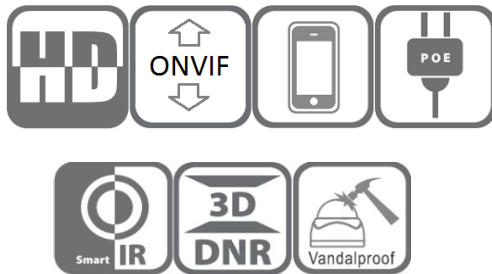

- ❖ 1/2.8" Sony IMX307 CMOS sensor
- ❖ Max 5MP resolution 2592 x 1944 output
- ❖ Ultra-low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror, Flip
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Optional customization Lens/Audio/Alarm/Storage/POE, etc.
- ❖ Lightning protection 4000V
- ❖ Strong waterproof and vandal proof housing, IP66
- ❖ 18 pcs SMD IR Led's, IR distance 20-30 meters
- ❖ HD 2.8– 12 mm motorized and AF lens

NVJ665MF-Z3X

Camera	
Image Sensor	1/2.8" SONY IMX307 CMOS
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.001 Lux @ F1.2 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto
BLC	Support
Embedded Solution	MSC328Q
Other	AGC, 2/3 DNR, Motion Detection, Privacy Mask, Mirror, Flip

Video Standard	H.265/H.264
Video Resolution	MainStream:25fps30fps@5MP(2592x1944),25fps30fps@4MP/3MP, 30fps@1080P/720P
	Sub stream: D1/VGA(640x480)/360P/QVGA@25fps
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
IR Led	
IR Led	18 Array SMD IR Leds
IR Distance	20-30 meters
Lens	
Focal length	2.8-12mm Motorized lens
Optional Function	
Audio, SD card slot	
Network Services	
Protocol	RTSP/FTP/DHCP/DDNS/NTP/SMTP/NFS
P2P	Yes
Web	IE , firefox 32bit ESR
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC \pm 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

